



# OL series

## Dry Reed Relay

Telecommunications, Office Machines.

Users should thoroughly review the technical data before selecting a product part number. It is recommended that user also seek out the pertinent approvals files of the agencies/laboratories and review them to ensure the product meets the requirements for a given application.

### Features

- Low cost, small package dry reed relay.
- 1 Form A and 2 Form A contact arrangements.
- Immersion cleanable, sealed version available. Consult factory.

### Contact Data @ 20°C

**Arrangements:** 1 Form A (SPST-NO), 2 Form A (DPST-NO).

**Material:** Rh, Ru.

**Max. Switching Rate:** 300 ops./min. (no load).  
30 ops./min. (rated load).

**Expected Mechanical Life:** 100 million operations (no load).

**Expected Electrical Life:** 1,000,000 operations (rated load).

**Minimum Load:** 1mA @ 1VDC.

**Initial Contact Resistance:** 150 milliohms @ 100mA, 6VDC.

### Coil Data

**Voltage:** 6 to 24VDC.

**Nominal Power:** 100 mW to 270mW.

**Coil Temperature Rise:** 30°C max., at rated coil voltage.

**Max. Coil Power:** 150% of nominal.

**Duty Cycle:** Continuous.

### Coil Data @ 20°C

OL				
Rated Coil Voltage (VDC)	Nominal Current (mA)	Coil Resistance (ohms) ± 10%	Must Operate Voltage (VDC)	Must Release Voltage (VDC)
6	34.3	175	4.20	0.60
9	22.5	400	6.30	0.90
12	17.1	700	8.40	1.20
24	11.4	2,100	16.80	2.40

### Contact Ratings

#### Ratings:

100µA @ 5VDC, 100,000,000 operations.

1mA @ 5VDC, 50,000,000 operations.

5mA @ 5VDC, 50,000,000 operations.

5mA @ 12VDC, 50,000,000 operations.

10mA @ 12VDC, 50,000,000 operations.

100mA @ 12VDC, 10,000,000 operations.

100mA @ 24VDC, 7,000,000 operations.

200mA @ 24VDC, 7,000,000 operations.

400mA @ 24VDC, 5,000,000 operations.

**Max. Switched Voltage:** AC: 120V.

DC: 60V.

**Max. Switched Current:** 0.5A.

**Max. Switched Power:** 10VA, 10W.

### Initial Dielectric Strength

**Between Open Contacts:** 200VDC. (1 second).

**Between Coil and Contacts:** 3,000VDC. (1 second).

**Surge Voltage Between Coil and Contacts:** 3,000V (10 / 160µs).

### Operate Data

**Must Operate Voltage:** 70% of nominal voltage or less.

**Must Release Voltage:** 10% of nominal voltage or more.

**Operate Time:** 1.0 ms max.

**Release Time:** 0.5 ms max.

### Environmental Data

**Temperature Range:**

**Operating:** -30°C to +60°C

**Vibration, Mechanical:** 10 to 55 Hz., 1.5mm double amplitude

**Operational:** 10 to 55 Hz., 1.5mm double amplitude.

**Shock, Mechanical:** 1,000m/s<sup>2</sup> (100G approximately).

**Operational:** 100m/s<sup>2</sup> (10G approximately).

**Operating Humidity:** 20 to 85% RH. (Non-condensing)

### Mechanical Data

**Termination:** Printed circuit terminals.

**Enclosure (94V-0 Flammability Ratings):** Snap-on dust cover.

**Weight:** 0.07 oz (2g) approximately.

**Ordering Information**

Typical Part Number ▶

**OL -C -1 12 H ,000**

**1. Basic Series:**

OL = Dry Reed Relay.

**2. Enclosure:**

C = Snap-on dust cover.

**3. Termination:**

1 = 1 pole                      2 = 2 pole

**4. Coil Voltage:**

06 = 6VDC                      12 = 12VDC  
09 = 9VDC                      24 = 24VDC

**5. Contact Rating:**

H = 0.1A @ 120VAC


**6. Suffix:**

,000 = Standard model                      Other Suffix = Custom model

**Our authorized distributors are more likely to stock the following items for immediate delivery.**

None at present.

**Outline Dimensions**

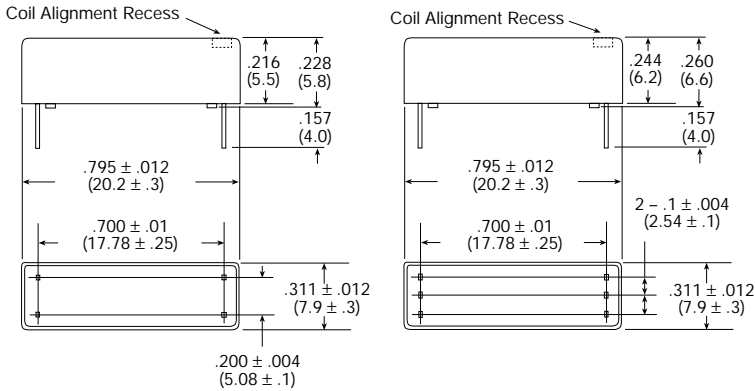


**Wiring Diagrams (Bottom View)**



**1 Form A                      2 Form A**

**PC Board Layouts (Bottom View)**

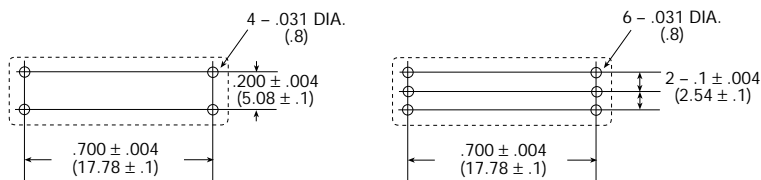

**1 Form A                      2 Form A**